




ESM-50

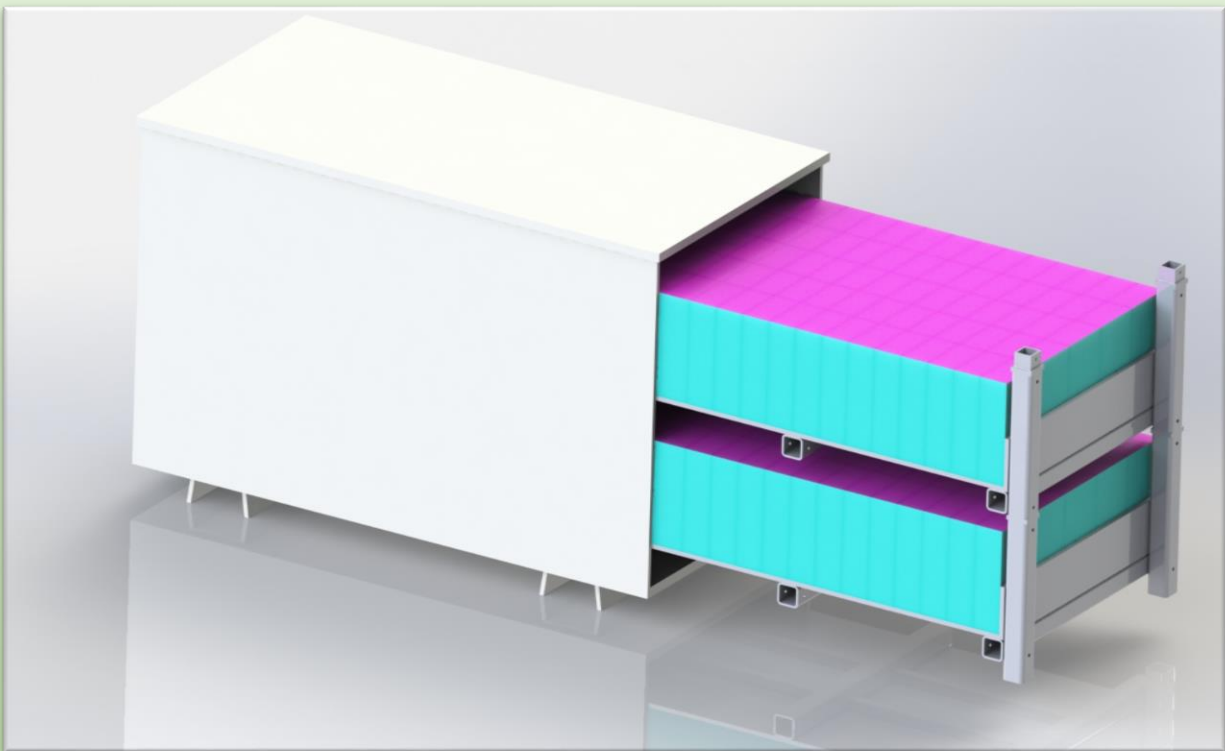

- ✓ *High Energy Density*
- ✓ *Robust and Reliable Energy Storage*

- ✓ *Low Heat*
- ✓ *Long Life*

Advanced Energy Storage

Energy Storage Module

Energy storage has a myriad of potential uses, from peak shaving to renewable integration. Having a dependable and scalable building block is crucial to developing different sized advanced energy storage systems. The Pacific Energy Advanced Energy Storage module is a 50kWhr battery that can be easily controlled and stacked; allowing for systems that range from a couple kWhr to MWhr systems.

Energy Storage Pack Specifications

Specification	Min	Nom	Max	Units
Battery Pack Capacity	50			kWh
Pack Voltage	448	528	584	V
Pack Current	-110		110	A
Pack Capacity	110			Ah
Cells		128		cells
Self-Discharge Rate			3%	/month
Chemistry		Lithium Ion (LiFeMnPO4)		

Storage Cell Specifications

Specification	Min	Nom	Max	Units
Voltage (per cell)	2.8	3.3	3.6*	Vdc
Capacity		110		Ah
Operating Temperature	-20		55	C
Lifetime	4000**			Cycles
Self-Discharge Rate			3%	/month
Chemistry		Lithium Ion (LiFeMnPO4)		

*Under typical operating conditions, see Figure 2a and 2b: Discharge/Charge Profiles

**Depends on DoD, see Figure 1: Minimum Lifetime vs. Depth of Discharge

Cell Management System

Specification	Min	Nom	Max	Units
Supply Voltage (included)	10		16	VDC
Supply Current (included)		250		mA
Operating Temperature	-40		80	C
Cell Balancing Current			200	mA
Cell Balancing Resolution		10		mV
Cell Sensing Resolution		1.5		mV
Communication		Controller Area Network (CAN)		

Environmental Specifications

Specification	Min	Nom	Max	Units
Temperature	0		50	C
Rated Max Elevation			6000	Ft
Enclosure Rating		Type 3R		

www.pacificenergyinc.com

Specifications subject to change without notice, contact Pacific Energy for updated information.

Copyright © 2014 TSJ, Inc. All rights reserved.

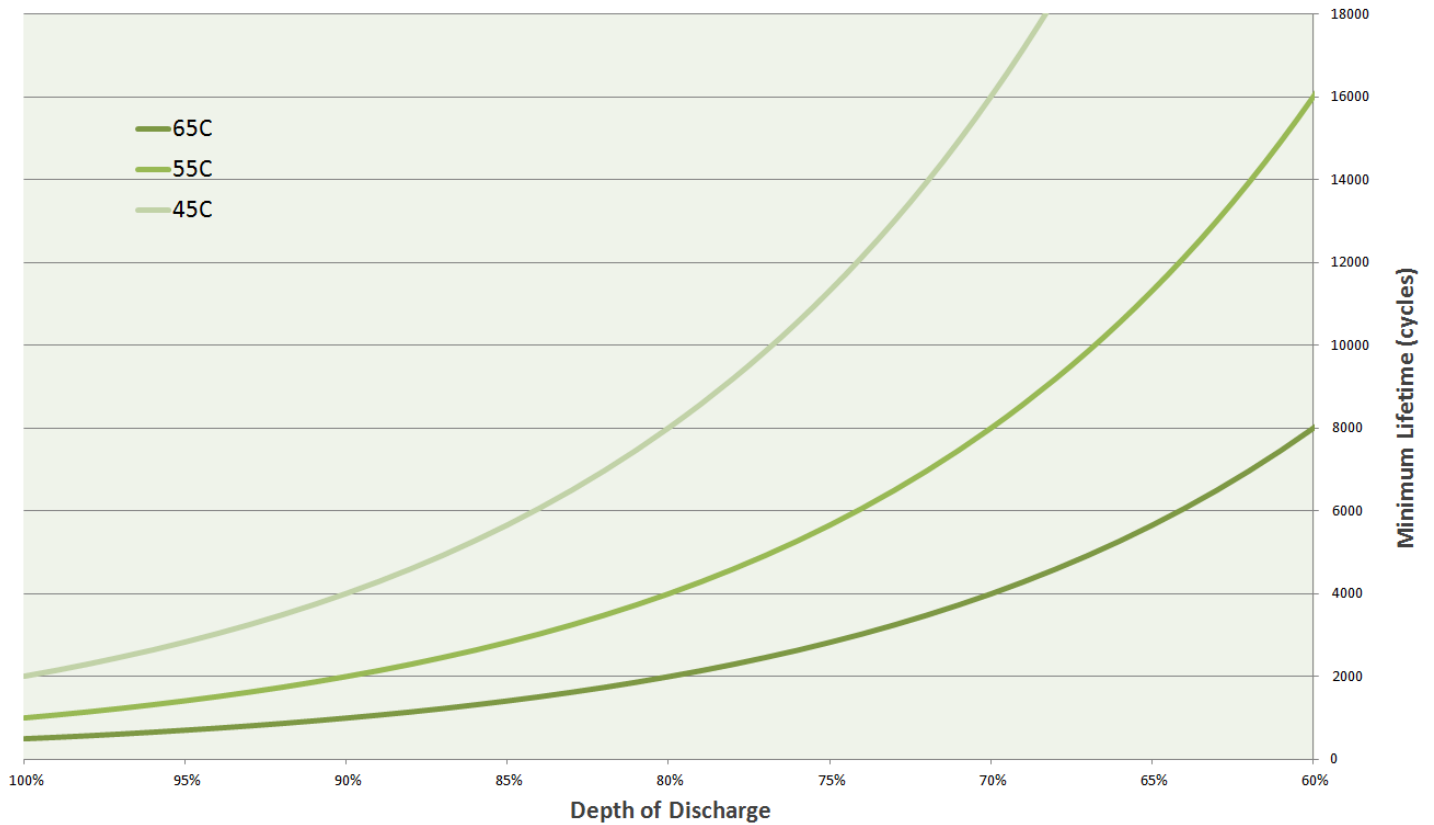


Figure 1. Minimum Lifetime vs. Depth of Discharge

Control and Safety

Specification

Monitors

- Cell Voltages
- Current
- Pack Voltage
- Temperature
- State of Charge (SoC)
- State of Health
- Depth of Discharge

Safety Features

- Storage Overvoltage
- Storage Undervoltage
- Storage Overcurrent
- Overtemperature
- Overcharge
- Undercharge
- BMS Fault

Communication

Controller Area Network (CAN)

Demand Response Application Example

The GO system operates as an add-on to a system which includes an inverter and photovoltaic (PV) solar panels. The diagram below shows the GO system tied to the inverter and PV. The power control unit of the GO system is connected to the PV and the inverter. The PV generates DC power and supplies power to the inverter and the power control unit of the GO system.

Energy storage can be coupled with an existing photovoltaic (PV) system to greatly reduce power costs. While PV production is based solely on the weather, energy storage power can be controlled. Using energy storage to save energy during the sunny hours and deliver that same energy during peak cost hours can reduce electricity bills substantially. The system would monitor the user's load, and if it begins to go above a certain peak threshold the energy storage would activate, serving some of the load, and reducing this peak, which in turn would result in lower peak demand charges.

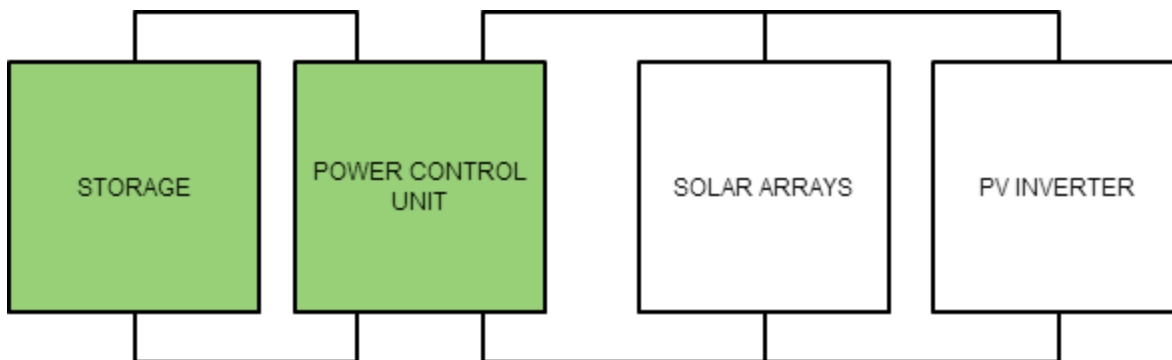


Figure 1. Block Diagram


Utility Application Example

The increasing integration of distributed renewable energy has increased stress on the power grid. By their very nature, photovoltaic (PV) energy fluctuates dramatically with weather. This fluctuating power output from these renewable sources can cause line regulators, tap changers, and switched capacitors to switch much faster than before. PV and inverter instabilities can also contribute to transients, harmonics, and instability in the distribution system. For example, if a PV string was generating 100 kW and a cloud passed over the array, this power could drop to under 50kW in less than 30 seconds. This can be very disruptive to the stability of the grid.

Adding energy storage to an existing PV system is one way to reduce these harmful effects. As can be seen above in figure 1, the Pacific Energy system can be added on to existing systems. The energy storage can buffer the output of the PV, reducing weather anomalies. The energy storage can also be used to level peaks in demand, create custom daily power outputs, and optimize the time at which the solar energy is sold for maximum profit.

Dimensions

Battery Bank (measurements in inches)

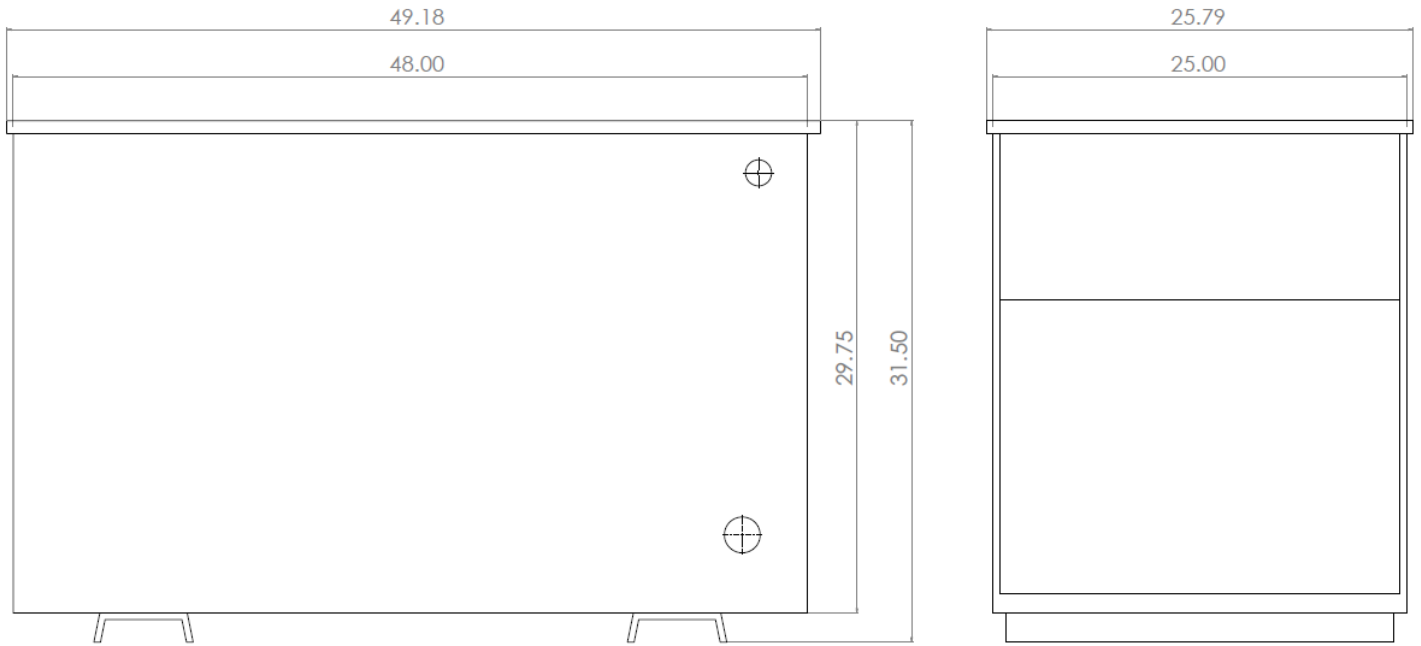

www.pacificenergyinc.com

Specifications subject to change without notice, contact Pacific Energy for updated information.

Copyright © 2014 TSJ, Inc. All rights reserved.